


MICRO 10 - DWS

Mid Power LED 24 Vdc - Pitch 8,3 mm

ALDABRA
LUCE CONTEMPORANEA

Submittal

Project: _____ Date: _____
Product Type: _____ Product Code: _____
Ordering Info: _____

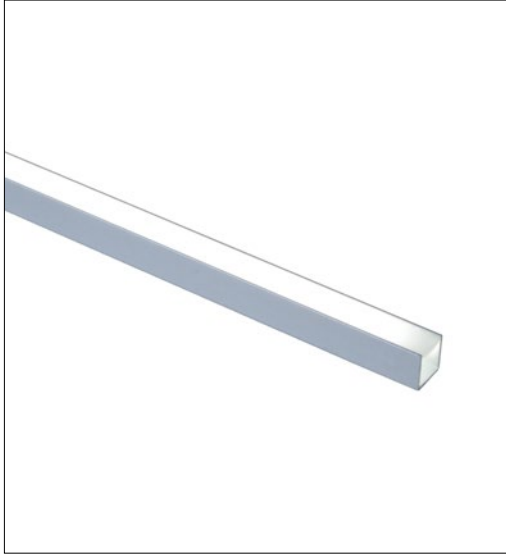

Product Description


Professional linear lighting systems suitable for indoor spaces, with extremely compact sizes of 8, 10, and 16 mm, available in both direct and indirect lighting. Ideal for. Easy to install with the fastening springs. The Micro range is made of aluminum and polycarbonate, available in natural anodized finishes.



Light Source

| | |
|----------------------------|-----------------------------------|
| Light Source | Mid Power LED LM 80 COMPLIANT |
| Colour Temperature (CCT) ! | DWS - Tunable White (2700K/6000K) |
| Pitch | 8,3 mm (0.326") |
| Cutting Pitch | 50 mm (1.968") |
| Power | 10 W/m (3.05 W/ft) |
| Colour Rendering Index | > 90 |
| Chromatic Selection | Mac Adam 2-Step |
| Light Source Efficiency | lm/W |
| Fixture Luminous Flux | lm/m (lm/ft) |
| LED Type | _____ |

Technical Drawing

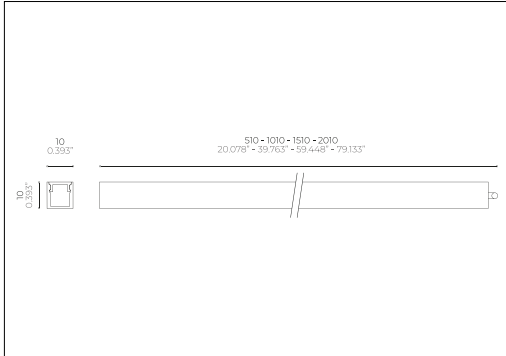


Power Supply

| | |
|-------------------------------|-------------------------|
| Voltage | 24 Vdc Constant Voltage |
| Dimming | PWM |
| Control Systems Compatibility | DALI; DMX |
| Driver | Remote |

Fixture

| | |
|--------------------|---|
| Materials | Aluminium Anticorodal EN AW-6060; Polycarbonate |
| Body Finishes ! | Anodized Aluminium |
| Weight | g/m (lb/ft) |
| Power Supply Cable | 1m (3,28ft) - 2xAWG18 (Red;Black) + 3xAWG20 (R/b, G/b, B/b) |
| Optics ! | _____ |
| Diffusers | Opal |
| Screens | _____ |

Installations

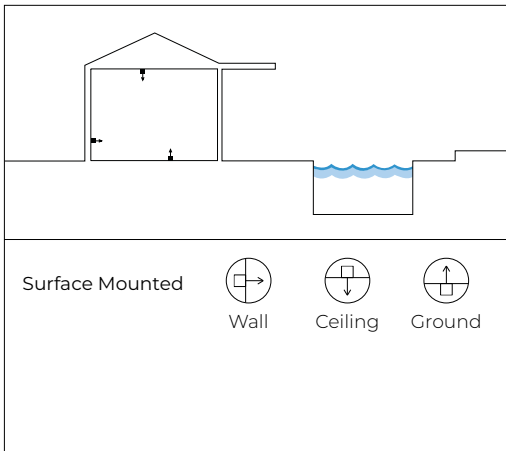

Temperature and Durability

| | |
|-------------------------|-----------------------------------|
| LED Lifetime T_a 25°C | > 50000 h (TM21 L80 B10 @50000 h) |
| Fixture Lifetime | > 50000 h |
| T_a Performance | 25°C (77°F) |
| T_a Operative | -30 ÷ 50 °C (-22 ÷ 122 °F) |
| Body Temperature | < 90 °C (194 °F) |
| Surface Temperature | ≤ 65 °C (149 °F) |

Installation

| | |
|-----------------------------|------------------------------------|
| Electrical Insulation Class | III |
| IP Protection Degrees | IP40 |
| Impact Resistance | IK05 |
| Driveability | _____ |
| Walkability | _____ |
| Certifications | CE |
| Normative | EN60598-1; EN60598-2 and its parts |

! Note: contact the factory for custom CCT, optics, finishes and lengths



750°C A A+ A++

Note:

- Power supplies, control&dimming devices and fixing kits must be ordered separately. - Aldabra power supply consumption is equal to 15% of the fixture nominal power.
- Specifications are subject to change without notice. - Photometric data available at www.aldabra.it - Aldabra, all rights reserved.


MICRO 10 - DWS

Mid Power LED 24 Vdc - Pitch 8,3 mm

ALDABRA
L U C E C O N T E M P O R A N E A

Part Number

example: **MIC.33.D98A1.0**



Length & Power ¹

- MIC.31** 510 mm / 1,67 ft - 5 W
- MIC.32** 1010 mm / 3,31 ft - 10 W
- MIC.33** 1510 mm / 4,95 ft - 15 W
- MIC.34** 2010 mm / 6,59 ft - 20 W

Optical Features ¹

- .D** Opal Diffuser

CCT ¹


- 98** DWS

Finishes ¹

- A1.0** Anodized Aluminium

Notes: _____

Installation Accessories



- ACC.0372.0**
Fixing Springs
for Filo 10 - Micro 10
- 10 pieces package

General Informations:

Kindly note that atmospheric agents (such as lightnings, etc), electrostatics charges or disturbances on the installation not caused by Aldabra lighting fixtures and Led drivers indicated by Aldabra itself, may cause damages on the fixtures. It is necessary that the electrical installation where the LED lighting fittings and their power supply units and control gears are installed must be equipped with proper devices for the protection and suppression of transient phenomena (SPD, isolation transformer, etc...). Such devices must be coordinated with the other protections of the installation; on this theme, it's necessary to refer to the electrical installations norms which are in force in each country.