
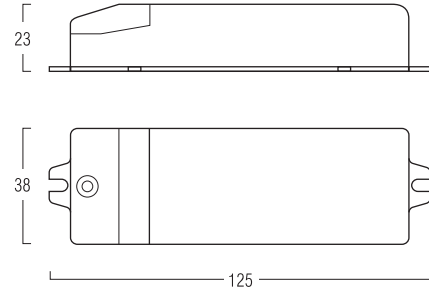


PSU.0022.0

500mA, 3-42V
PASSIVE PFC

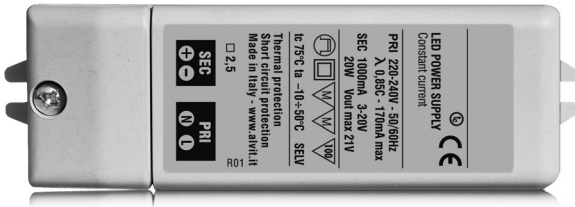

Constant Current

Mains voltage AC	220-240V
Mains voltage DC	176-276V
Mains frequency	0 / 50/60 Hz
Mains current	150 mA
Power factor	>0,85 C
Max output current	500mA
Output voltage	3-42V
Max output voltage	45V
Output power	21W
Ambient temperature Ta	-10 ÷ 50° C
Max case temperature on Tc	75°
Weight	0,08 Kg

- > Independent driver
- > Passive PFC
- > Constant current version for power LED
- > Constant voltage version for power LED
- > Typical ripple current <3%
- > Degree protection, IP20
- > Screwable terminals connection, 2,5mmq
- > Class II protection
- > Short circuit, overload, open circuit and thermal protection
- > Nominal life-time up to 50,000h at ta 40 °C
- > Complying with EN61347-2-13, EN61347-1, EN62384, EN55015, EN61000-3-2, EN61547

The product image is indicative only