

DIVA R3 RGB

Power LED 24 Vdc - Bus on Board

ALDABRA
LUCI CONTEMPORANEA

Submittal

Project: _____ Data: _____
 Product Type: _____ Product Code: _____
 Ordering Info: _____



Product Description


Professional recessed luminaires with reduced recessed depth, available in different shapes: square, rectangular and circular. Suitable for indoor and outdoor applications. Made of aluminium, steel and tempered glass screen.



Light Source

Light Source	Power LED LM 80 COMPLIANT
Colour Temperature !	RGB
Power	24 W
Colour Rendering Index	> 90
Chromatic Selection	Mac Adam 2-Step
Light Source Efficiency	lm/W
Fixture Luminous Flux	lm
Central Beam Candle Power (CBCP)	—
LED Type	—

Technical Drawing

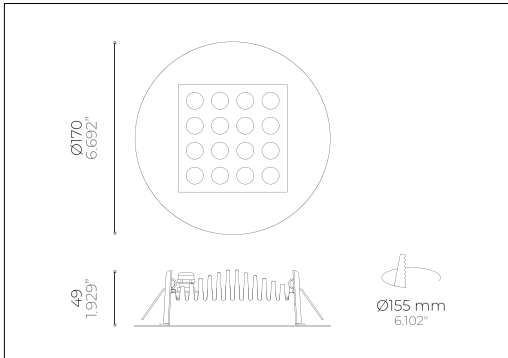


Power Supply

Voltage	24 Vdc Constant Voltage
Dimming	PWM
Control Systems Compatibility	DALI; DMX
Driver	Remote

Fixture

Materials	Die Cast Aluminium
Body Finishes !	White Sablè; Black Sablè
Weight	800 g (1.763 lb)
Power Supply Cable	0,5m (1,64 ft) - 2xAWG18 (Red;Black) + 3xAWG20 (R/b, G/b, B/b)
Optics !	Narrow 10°; Medium 22°; Wide 40°
Diffusers	—
Screens	—

Installation

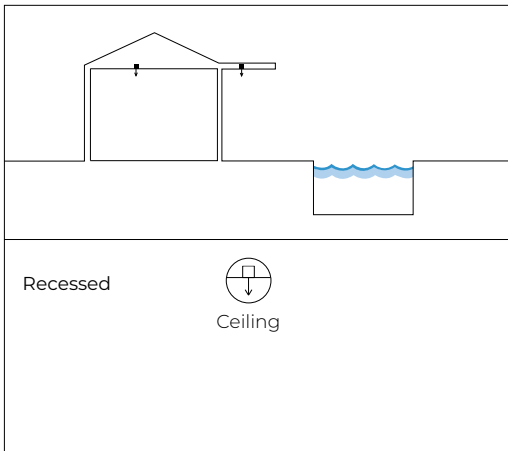

Temperature and Durability

LED Lifetime T ₈ 25°C	> 50000 h (TM21 L80 B10 @50000 h)
Fixture Lifetime	> 50000 h
T ₈ Performance	25°C (77°F)
T ₈ Operative	-30 ÷ 50 °C (-22 ÷ 122 °F)
Body Temperature	< 90 °C (194 °F)
Surface Temperature	≤ 65 °C (149 °F)

Installation

Electrical Insulation Class	III
IP Protection Degrees	IP65
Impact Resistance	IK06
Driveability	—
Walkability	—
Certifications	CE; UL listed
Normative	EN60598-1; EN60598-2 and its parts; UL 676; CSA C222 No.89-15; UL 2108; UL 1598/C250-08

! Note: contact the factory for custom CCT, optics, finishes and lengths



960°C

AQA STOP FLEX

A A+ A++

Note:

- Power supplies, control&dimming devices and fixing kits must to be orderd separately. - Aldabra power supply consumption is equal to 15% of the fixture nominal power. - Specifications are subject to change without notice. - Photometric data available at www.aldabra.it - Aldabra, all rights reserved.

DIVA R3 RGB

Power LED 24 Vdc - Bus on Board

ALDABRA
L U C E C O N T E M P O R A N E A

Part Number

example: **DIV.05.M90.W2.0**



Diameter & Power ¹

- DIV.05** Ø170 x 49 mm - 24 W
Ø6.692" x 1.929" mm - 24 W

Optical Features ¹

- M** Narrow 10°
 F Medium 22°
 W Wide 40°

CCT ¹

- 90** RGB

Finishes ¹

- B2.0** Black Sablè
 W2.0 White Sablè

Notes: _____

Generic Accessories



- ACC.0005.0**
IP68 Waterproof connection
box with gel
4 channels - 3 poles

General Informations:

Kindly note that atmospheric agents (such as lightnings, etc), electrostatics charges or disturbances on the installation not caused by Aldabra lighting fixtures and Led drivers indicated by Aldabra itself, may cause damages on the fixtures. It is necessary that the electrical installation where the LED lighting fittings and their power supply units and control gears are installed must be equipped with proper devices for the protection and suppression of transient phenomena (SPD, isolation transformer, etc...). Such devices must be coordinated with the other protections of the installation; on this theme, it's necessary to refer to the electrical installations norms which are in force in each country.